RoHS COMPLIANT

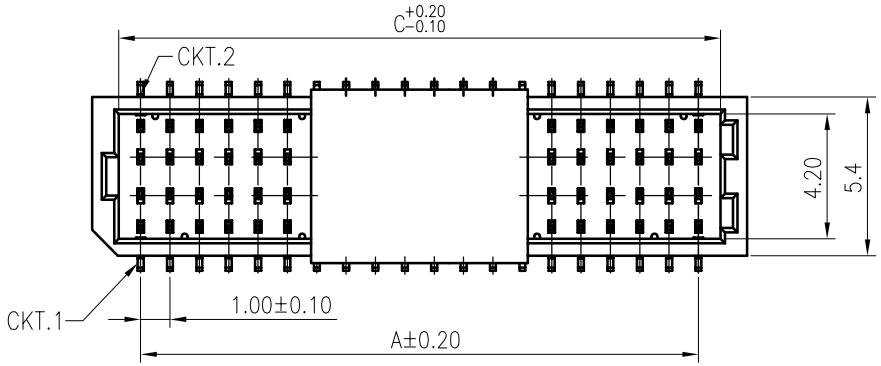



SPECIFICATIONS
1. Current rating: 1A AC, DC
2. Voltage rating: 50V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 100MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material:
Insulator: PA6T UL 94V-0
Contact: Phosphor bronze
Fitting nail: Brass
Plating: Gold plated over nickel
Mate with KR1000 series dual row housing

Ordering Code:

C1000VS *** ** G0101RC
A3 No.of Circuits
204:2x4,230:2x30
Insulator Material
09:PA6T Natural

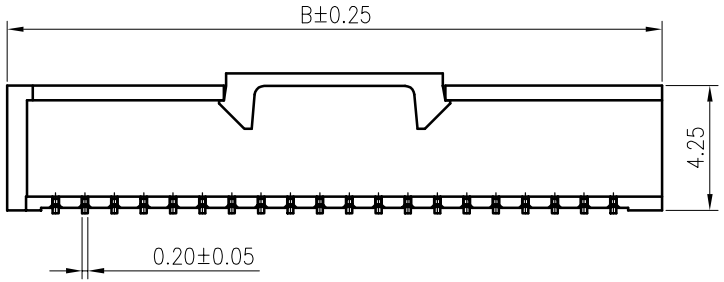

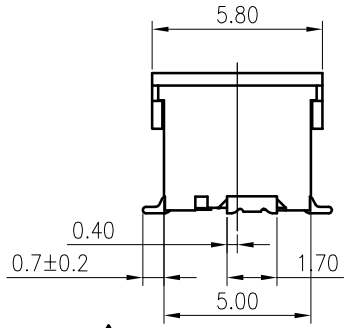

A3 2*8P~2*30P Cover



A3 2*4P-2*7P Mylar

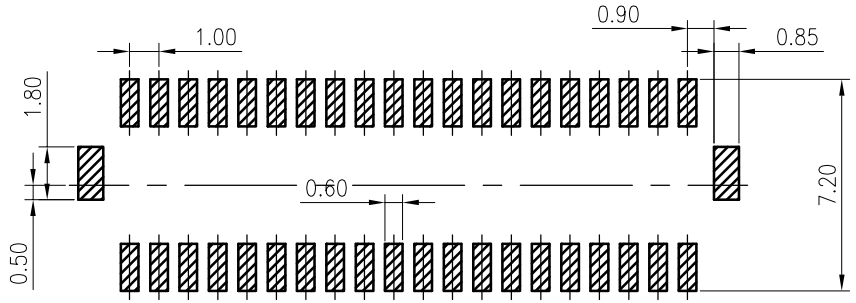

Recommended P.C.Board Layout
All Tolerance:±0.05

Circuits	Dimensions		
	A	B	C
2x4	3.00	6.30	4.40
2x5	4.00	7.30	5.40
2x6	5.00	8.30	6.40
2x7	6.00	9.30	7.40
2x8	7.00	10.30	8.40
2x9	8.00	11.30	9.40
2x10	9.00	12.30	10.40
2x12	11.00	14.30	12.40
2x14	13.00	16.30	14.40
2x15	14.00	17.30	15.40
2x17	16.00	19.30	17.40
2x20	19.00	22.30	20.40
2x25	24.00	27.30	25.40
2x30	29.00	32.30	30.40

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A4			
A3	Add 2x4-2x9/2x12/2x14/2x17/2x30P	Arvin	2020.12.24
A2	Change the part number and frame format	Arvin	2020.03.05

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
SHR 1.0 SMT 180°
Dual Row Wafer
无柱

UNIT:mm | SCALE:N/A

DRAWN: Arvin 2020.03.05
CHECKED:
APPROVED:
SHEET:1/1 | PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.
PART NO.:C1000VS***09G0101RC
REV.:A3 | DRAWING NO.:1000WVS201-C-S