

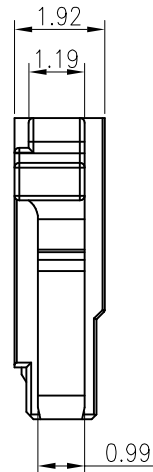
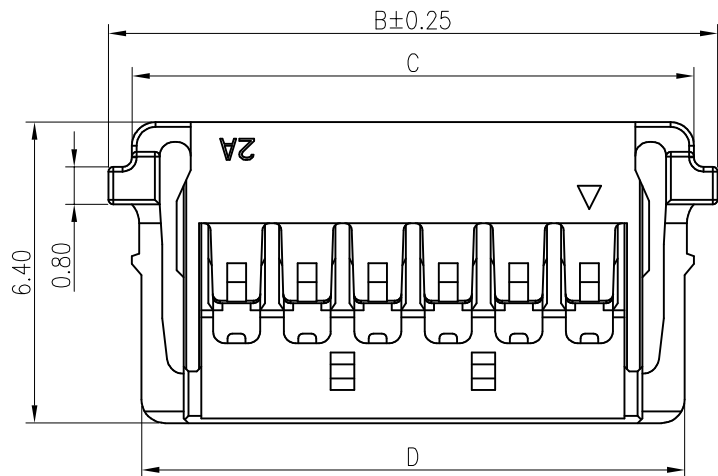


RoHS
COMPLIANT

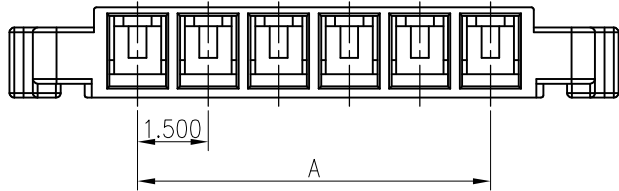

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:PA66 UL 94V-0
Suitable KR1509 series terminal
Mate with KR1509 series wafer

Ordering Code:

H15090 *** ** 01A

No.of Circuits

102:02,112:12

Insulator Material

02:PA66 Black V0

Circuits	Dimensions			
	A	B	C	D
2	3.00	6.95	5.95	5.55
3	4.50	8.45	7.45	7.05
4	6.00	9.95	8.95	8.55
5	7.50	11.45	10.45	10.05
6	9.00	12.95	11.95	11.55
7	10.50	14.45	13.45	13.05
8	12.00	15.95	14.95	14.55
9	13.50	17.45	16.45	16.05
10	15.00	18.95	17.95	17.55
11	16.50	20.45	19.45	19.05
12	18.00	21.95	20.95	20.55



MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X. X ±0.30

X. XX ±0.20

X. XXX ±0.10

Angle ±2°

TITLE:
1.5 Side Buckel
Housing

UNIT: mm SCALE: N/A

DRAWN: Arvin 2020.03.05

CHECKED:

APPROVED:

SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO. : H15090***0201A

REV. : A1 DRAWING NO. : 1509H101-A-S