




RoHS
COMPLIANT

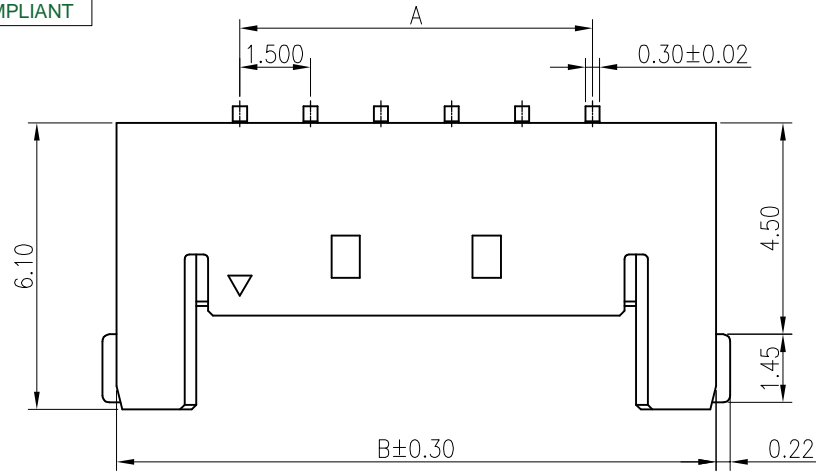

2P-4P Single Hole
Scale 1:0.7

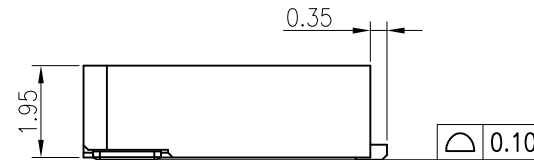

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:

Insulator: PA4T UL 94V-0
Contact: Brass/Gold flash over Nickel
Solder tabs: Brass/Tin plated over Nickel
Mate with KR1509 series Housing

Ordering Code:

C1509RS *** ** G0101RA

No.of Circuits

102:02,112:12


Insulator Material

42:PA4T Black


Plating

G01:Gold flash

Circuits	Dimensions	
	A	B
2	1.50	6.75
3	3.00	8.25
4	4.50	9.95
5	6.00	11.25
6	7.50	12.75
7	9.00	14.25
8	10.50	15.75
9	12.00	17.25
10	13.50	18.75
11	15.00	20.25
12	16.50	21.75

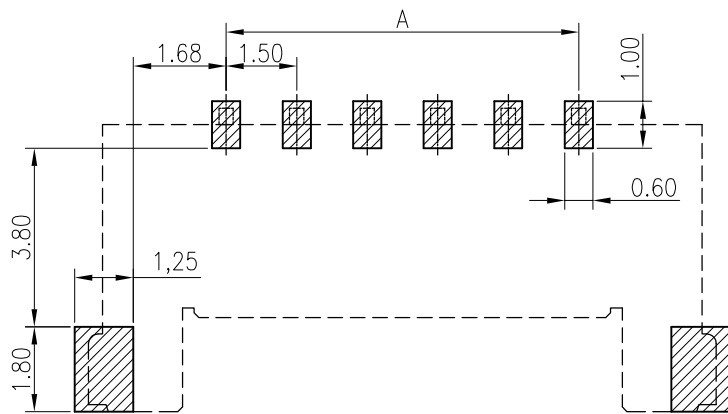

Recommended P.C.B. Layout
Total tolerance:±0.05mm

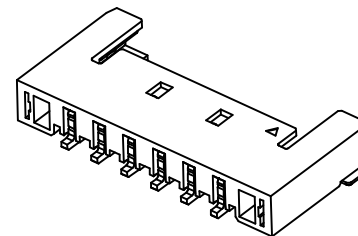

MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X. X ±0.30

X. XX ±0.20

X. XXX ±0.10

Angle ±2°

TITLE:
1.5 Side BuckelSM^T
90° Wafer

UNIT: mm

SCALE: N/A

DRAWN: Arvin 2020.03.05

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO. : C1509RS***42G0101RA

REV. : A1

DRAWING NO. : 1509WRS101-A-S