





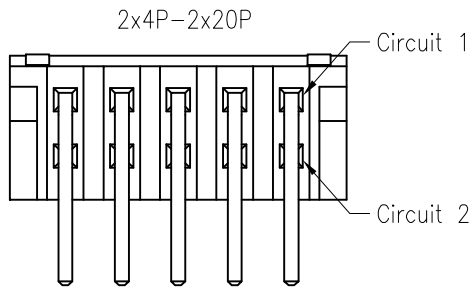


RoHS
COMPLIANT

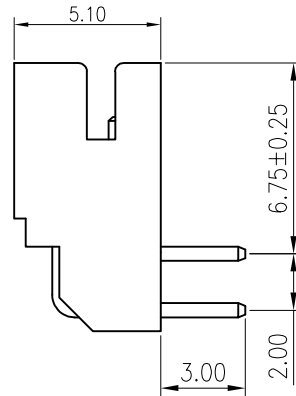

Recommended P.C.B. Layout
Total tolerance:±0.05mm

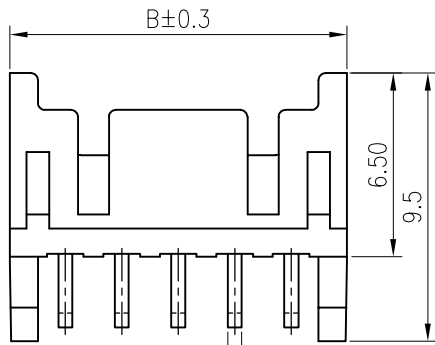

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20m Ω Max.

Material:

Insulator: PA66 UL 94V-0
Contact: Brass/Tin plated over nickel
Mate with KR2005 series housing

Ordering Code:

C2005RD *** 22 T01 01PC
No. of Circuits | 202:2x2,220:2x20
Plating:
T01: Tin plated

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2x2	2.00	6.00	2x12	22.00	26.00
2x3	4.00	8.00	2x13	24.00	28.00
2x4	6.00	10.00	2x14	26.00	30.00
2x5	8.00	12.00	2x15	28.00	32.00
2x6	10.00	14.00	2x16	30.00	34.00
2x7	12.00	16.00	2x17	32.00	36.00
2x8	14.00	18.00	2x18	34.00	38.00
2x9	16.00	20.00	2x19	36.00	40.00
2x10	18.00	22.00	2x20	38.00	42.00
2x11	20.00	24.00			



MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:

PHD2.0 DIP 90°
Wafer

DRAWN: Arvin 2021.08.13

CHECKED:

APPROVED:

UNIT: mm

SCALE: N/A

SHEET: 1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co., Ltd.

PART NO.: C2005RD2**22T0101PC

VER.: A1

DRAWING NO.: 2005WRD201-C-S