



RoHS
COMPLIANT


SPECIFICATIONS






1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 10mΩ Max.

Material: Nylon 66 UL 94V-0
Suitable KR2508 series terminal
Mate with KR2508 series wafer
Ordering Code:

 H2508V *** 01 01B

No.of Circuits 
102:2,116:16

Insulator Material 
01:PA66 White V0

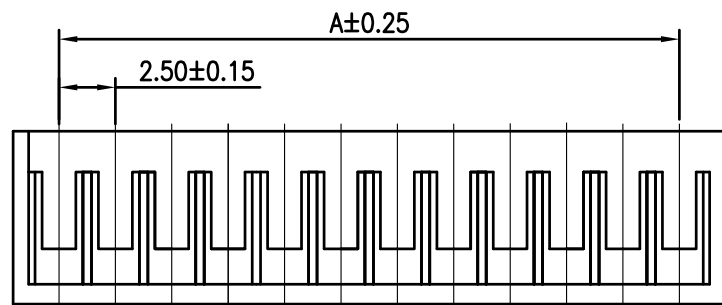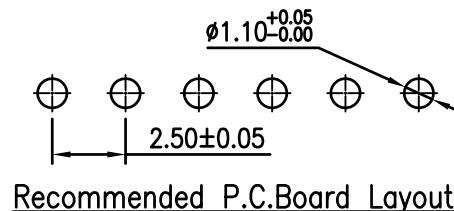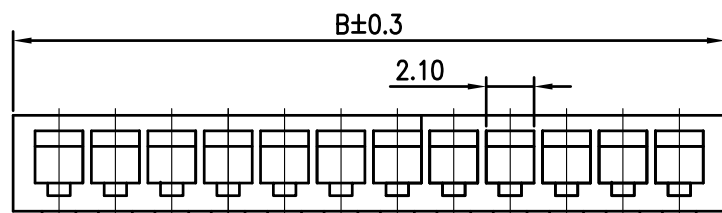

Circuits	Dimensions	
	A	B
2	2.50	6.50
3	5.00	9.00
4	7.50	11.50
5	10.00	14.00
6	12.50	16.50
7	15.00	19.00
8	17.50	21.50
9	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00
15	37.50	41.50

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
SCN2.5 180°
Housing

DRAWN: Liujingtian 2020.5.06

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H2508V***0101B

MARK REVISION DESCRIPTION SIGNATURE DATE UNIT:mm SCALE:N/A SHEET:1/1 PROJECTION  REV.:A2 DRAWING NO.:2508HV101-B-S

1 2 3 4 5 6 7 8 9