




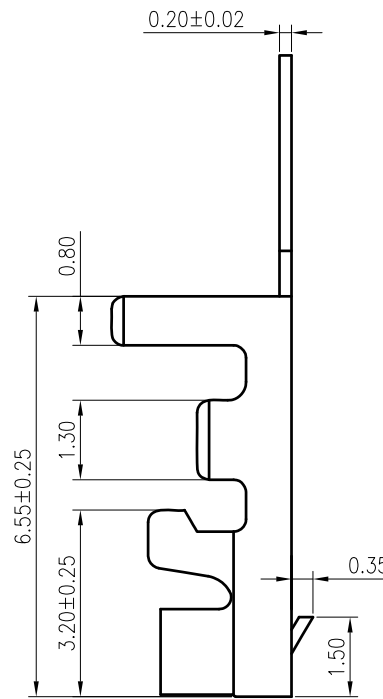


RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 10mΩ/ max.

Material: Phosphor bronze
 Plating: Tin plated over nickel
 Applicable wires: AWG #22~#28
 Insulation O.D.: 1.90mm Max.
 Suitable KR2516 series housing
 Q'ty/reel: 10,000 PCS

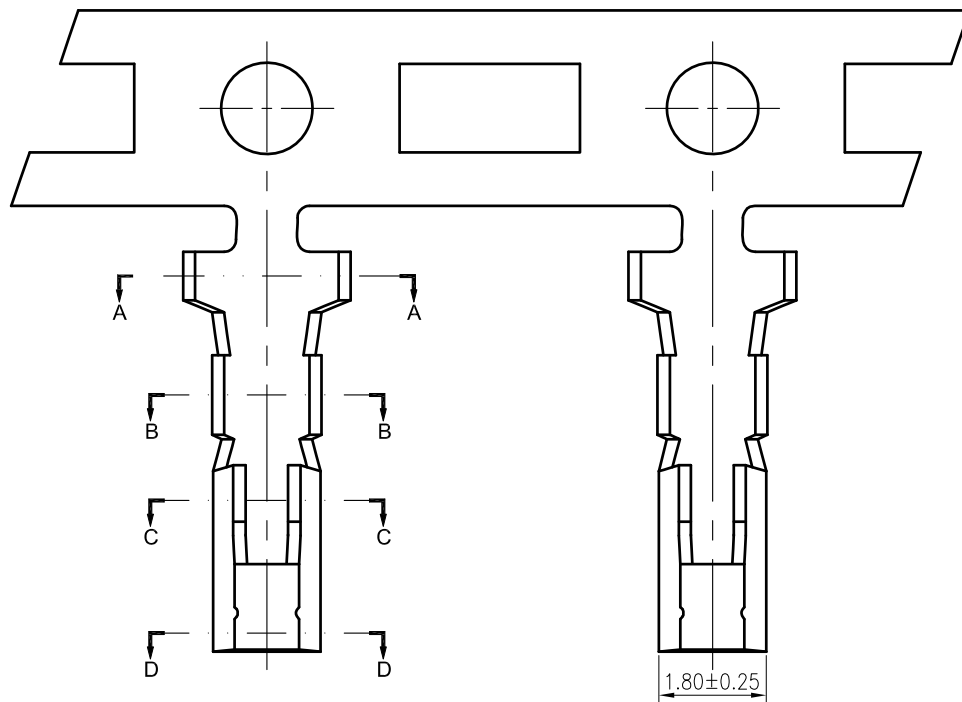

F					TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: XA2.5 Terminal	DRAWN: <i>Arvin 2020.05.29</i>	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.	
							CHECKED:		
		Uniformly arrange the drawings	Arvin	2020.05.29			APPROVED:		PART NO.: T25160PT0101A
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	REV.:A2	DRAWING NO.:2516T101-A-S