

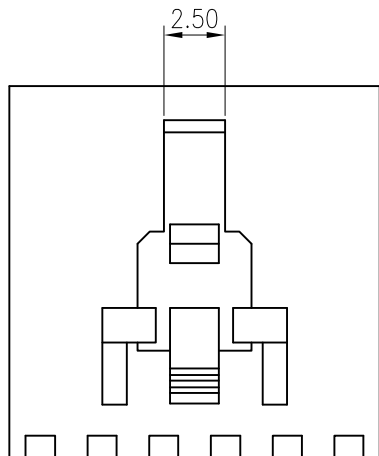


RoHS
COMPLIANT

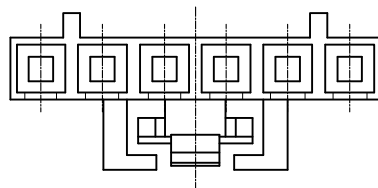

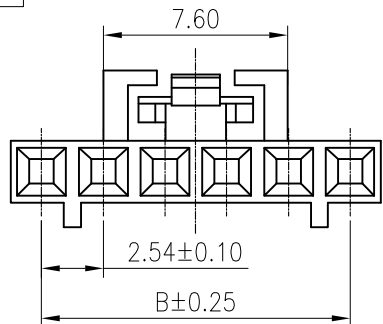




SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL 94V-0
Suitable KR2541 series terminal
Mate with KR2541 series wafer
Ordering Code:

H2541M *** ** 01C

No. of Circuits 
104:4, 120:20
Insulator Material 
02:PA66 Black V0

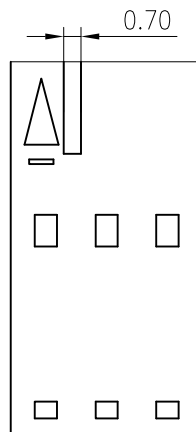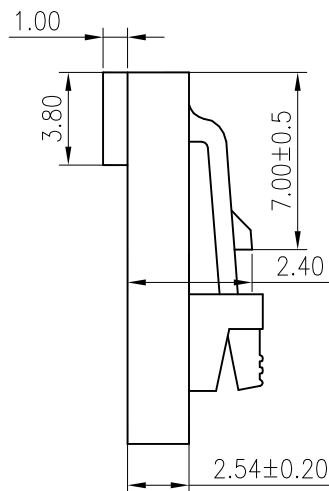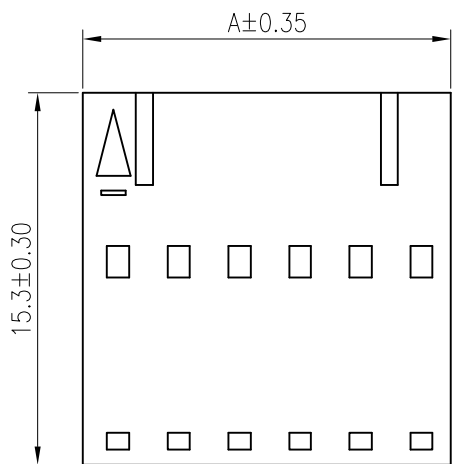

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	5.08	2.54	12	30.48	27.94
3	7.62	5.08	13	33.02	30.48
4	10.16	7.62	14	35.56	33.02
5	12.70	10.16	15	38.10	35.56
6	15.24	12.70	16	40.64	38.10
7	17.78	15.24	17	43.10	40.64
8	20.32	17.78	18	45.64	43.10
9	22.86	20.32	20	50.72	48.18
10	25.40	22.86			
11	27.94	25.40			



MARK

REVISION DESCRIPTION

SIGNATURE

DATE

TOLERANCE

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
MX2.54 Ultra-thin
Have Buckle Female
Housing

UNIT:mm SCALE:N/A

DRAWN: Liujingtian 2020.5.13

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION 

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H2541M***0201C

REV.: A2 DRAWING NO.: 2541HM101-C-S

1

2

3

4

5

6

7

8

9