
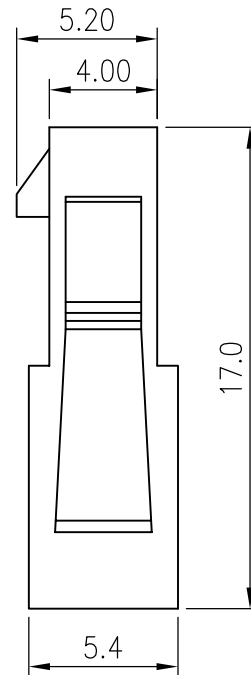
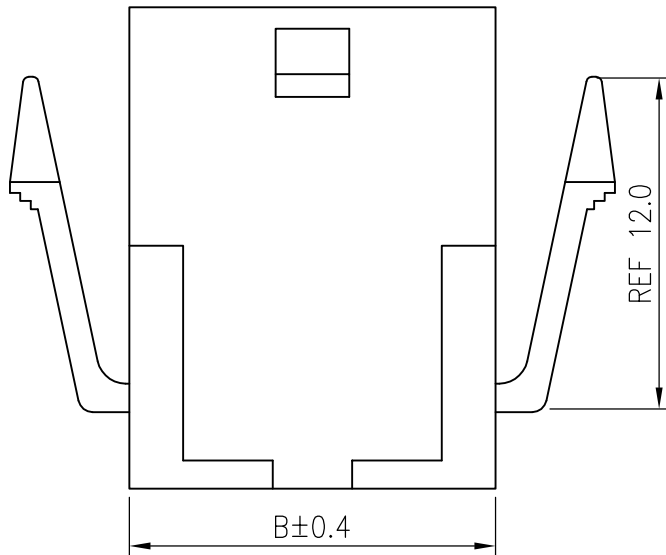
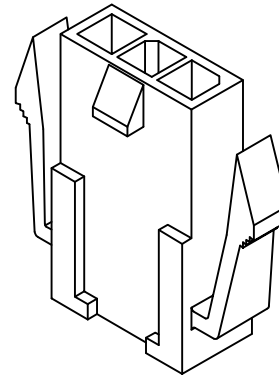


RoHS
COMPLIANT

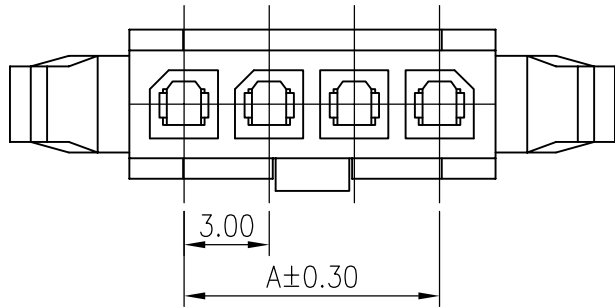

◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Nylon66 UL94 V-2
 Suitable: KR3000HM series Terminal
 Mates With KR3000HF Series Single Row Housing
 And KR3000WF Series Single Row Wafer
 MOQ:1,000PCS

Ordering Code:

H3000F *** 04 02B

No.of Circuits
 102:2P,112:12P

Insulator Material
 04:PA66 Black V-2

Circuits	Dimensions	
	A	B
2P	3.0	7.00
3P	6.0	10.00
4P	9.0	13.00
5P	12.0	16.00
6P	15.0	19.00
7P	18.0	22.00
8P	21.0	25.00
9P	24.0	28.00
10P	27.0	31.00
11P	30.0	34.00
12P	33.0	37.00

△4			
△3			
△2	Change the part number and frame format	ZSZ	2022.03.14
MARK	REVISION DESCRIPTION	SIGNATURE	DATE

TOLERANCE
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±2°

TITLE:
 MK 3.0 Single Row
 Female Housing
 With wings
 UNIT: mm SCALE: N/A

DRAWN: *Arwin 2017.09.05*
 CHECKED:
 APPROVED:
 SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
 DongGuan Konnra Electronics Co., Ltd.
 PART NO. : H3000F***0402B
 REV. : A2 DRAWING NO. : 3000HF102-B-S