

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 5A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10mΩ Max.





Material:

Insulator: LCP UL 94V-0
 Contact: Brass/Matte-tin plated over nickel
 Solder Tab: Brass/Matte-tin plated over nickel
 Circuits: 2~12
 Mate with KR3000 series single row housing


Ordering Code:

C3000VS *** 14 M0101 R A

No. of Circuits: 102:2P, 103:3P.....
 Insulator Material: 14:LCP Black
 Packing: R: Reel Tape, P: Bag

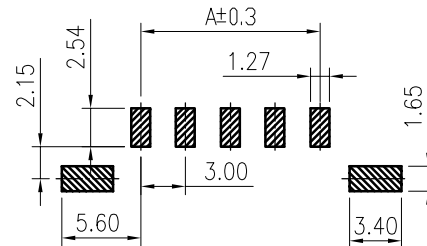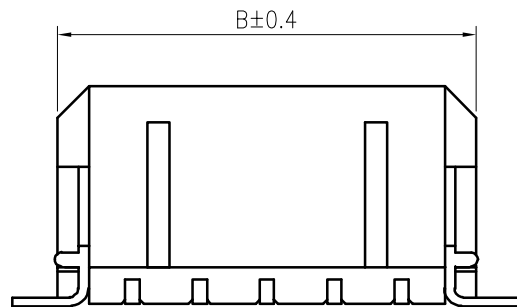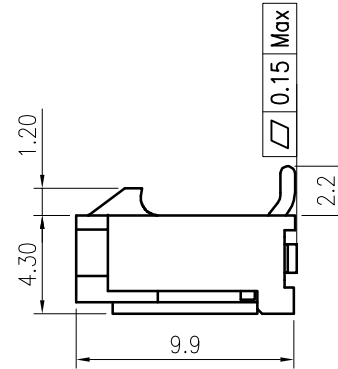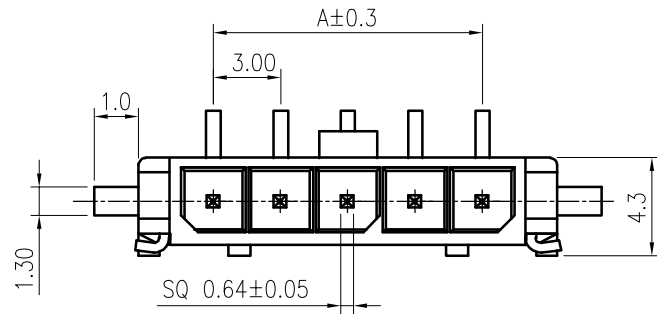

Recommended P.C.B. Layout
 Total tolerance:±0.05mm

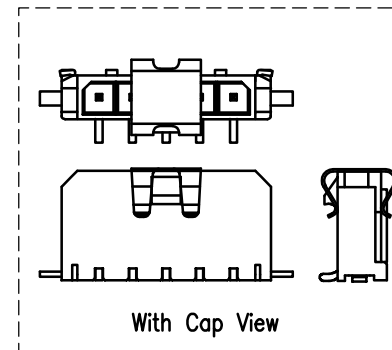

PIN NO.	DIMENSIONS	
	A	B
2P	3.00	9.7
3P	6.00	12.7
4P	9.00	15.7
5P	12.00	18.7
6P	15.00	21.7
7P	18.00	24.7
8P	21.00	27.7
9P	24.00	30.7
10P	27.00	33.7
11P	30.00	36.7
12P	33.00	39.7

F					TOLERANCE	TITLE:	DRAWN: ru yi 2020.03.10	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
		Uniformly arrange the drawings	Arvin	2021.09.23	X. X ±0.30	MK3.0 SMF 180°	CHECKED:			
		Change the part number and frame format	Ru yi	2020.3.10	X. XX ±0.20	Wafer With Solder	APPROVED:	PART NO.: C3000VS1**14M0101RA		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X. XXX ±0.10	Tab Single Row	SHEET: 1/1	PROJECTION	REV.: A3	DRAWING NO.: 3000WS101-A-S
	1	2	3	4	5	6	7	8	9	