
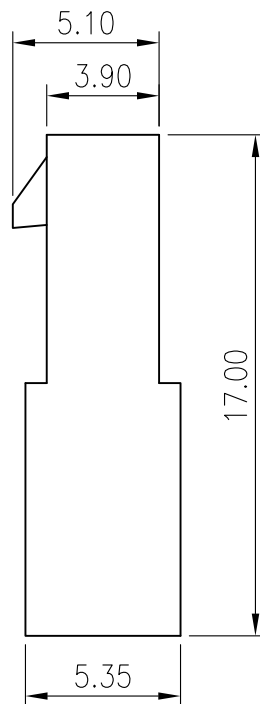
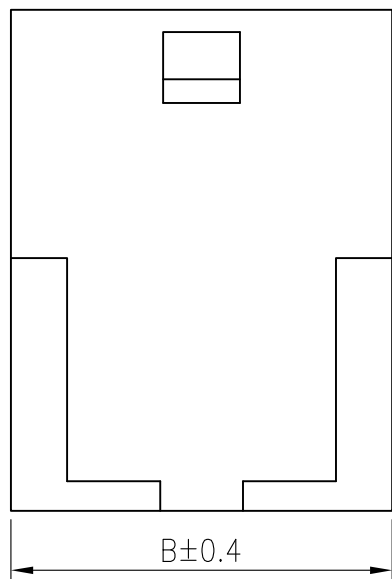


**RoHS**  
COMPLIANT

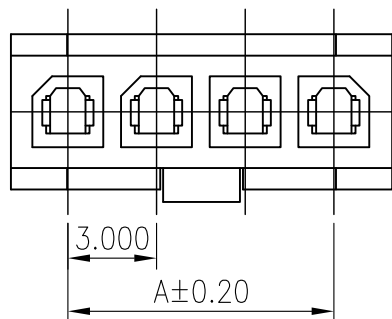

◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon66 UL94 V0 or V2

Suitable: KR3000HM series Terminal  
Mates With KR3000HF Series Single Row Housing  
And KR3000WF Series Single Row Wafer  
MOQ:1,000PCS  
Ordering Code:

H3000F 1\*\* \*\* 01B


No. of Circuits  
102:2P, 112:12P

Insulator Material  
02:PA66 Black V-0  
04:PA66 Black V-2


Circuits	Dimensions	
	A	B
2P	3.0	6.85
3P	6.0	9.85
4P	9.0	12.85
5P	12.0	15.85
6P	15.0	18.85
7P	18.0	21.85
8P	21.0	24.85
9P	24.0	27.85
10P	27.0	30.85
11P	30.0	33.85
12P	33.0	36.85

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.				
A03	Added part number description and full PIN map	ZSZ	2024.07.15	X.X ±0.30	MX 3.0 Single Row Female Housing No Wings	353 2024.07.15	PART NO.: H3000F1****01B				
A2	Change the part number and frame format	ZSZ	2022.03.14	X.XX ±0.20		CHECKED:					
				X.XXX ±0.10		APPROVED:					
				Angle ±2°	UNIT:mm	SCALE:N/A	SHEET:1/2	PROJECTION	REV.:A03	DRAWING NO.:3000HF101-B-S	


**RoHS**  
COMPLIANT




2P




3P




4P




5P




6P




7P




8P




9P



10P



11P



12P

F		Added part number description and full PIN map	ZSZ	2024.07.15	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: MX 3.0 Single Row Female Housing No Wings		DRAWN: <i>ZSZ</i> 2024.07.15		<b>KONNRA</b> 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
		Change the part number and frame format	ZSZ	2022.03.14				CHECKED:				
		MARK	REVISION DESCRIPTION	SIGNATURE				DATE	UNIT:mm	SCALE:N/A	SHEET:2/2	PROJECTION

1 2 3 4 5 6 7 8 9