
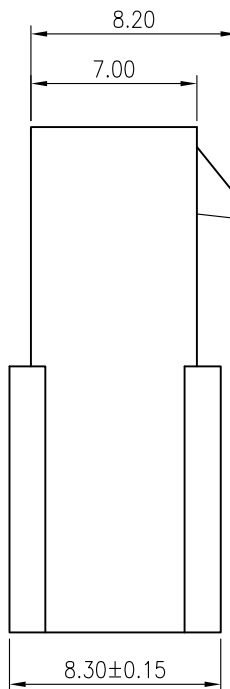
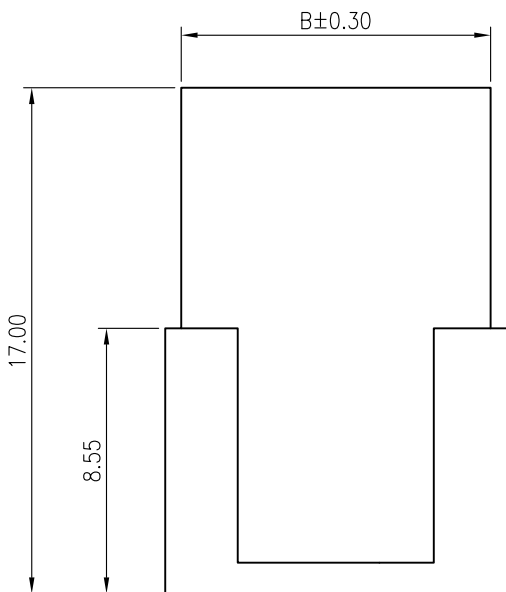


RoHS
COMPLIANT

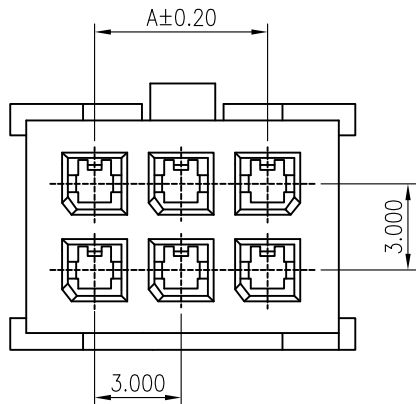

◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Nylon66 UL94 V0 or V2
Suitable: KR3000 series Terminal
Mates With KR3000 series dual row male housing and KR3000 series dual row wafer

Ordering Code:


H3000F 2** ** 01B

No. of Circuits
201:2x1,212:2x12
Insulator Material
02:PA66 Black V-0
04:PA66 Black V-2


Circuits	Dimension	
	A	B
2x1	—	3.85
2x2	3.0	6.85
2x3	6.0	9.85
2x4	9.0	12.85
2x5	12.0	15.85
2x6	15.0	18.85
2x7	18.0	21.85
2x8	21.0	24.85
2x9	24.0	27.85
2x10	27.0	30.85
2x11	30.0	33.85
2x12	33.0	36.85

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.				
A03	Added part number description and full PIN map	ZSZ	2024.07.15	X.X ±0.30	MX3.0 Double Row Female Housing No Wings	353 2024.07.15	PART NO.: H3000F2****01B				
A2	Change the part number and frame format	ZSZ	2022.03.14	X.XX ±0.20		CHECKED:					
				X.XXX ±0.10		APPROVED:					
				Angle ±2°	UNIT:mm SCALE:N/A	SHEET:1/2	PROJECTION	REV.:A03	DRAWING NO.:3000HF201-B-S		


RoHS
COMPLIANT




2*1P




2*2P




2*3P




2*4P




2*5P




2*6P

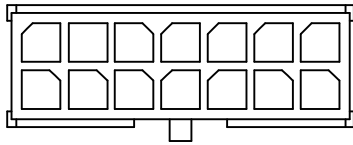


2*7P

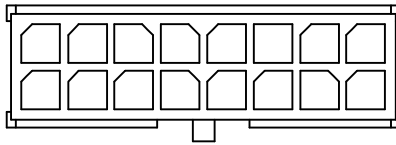


2*8P

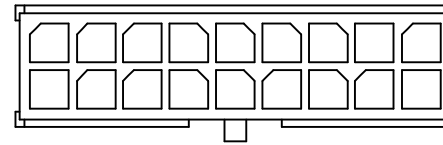


2*9P

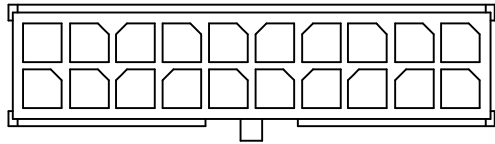

2*10P

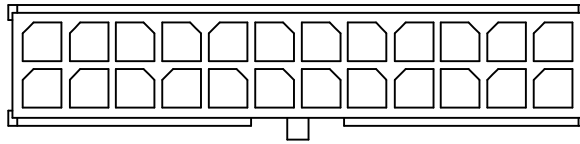

2*11P

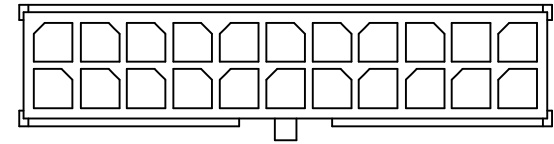

2*12P

F		Added part number description and full PIN map	ZSZ	2024.07.15	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: MX3.0 Double Row Female Housing No Wings	DRAWN: <i>ZSZ</i> 2024.07.15	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.				
		Change the part number and frame format	ZSZ	2022.03.14			CHECKED:				APPROVED:	PART NO.: H3000F2****01B
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT:mm				SCALE:N/A	SHEET: 2/2