

RoHS  
COMPLIANT

SPECIFICATIONS

1. Current rating: 9A(2P AWG#16) AC, DC
2. Voltage rating:600V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10mΩ/ max.

Material:

Insulator: Nylon 66 UL 94V-2

Contact: Brass

Plating: Tin plated over Nickel

Mate with KR4200 series double row male housing

Ordering Code:


C4200VD \*\*\* 16 T0104PB

No.of Circuits


201:2\*1,212:2\*12

Insulator Material


16:PA66 Transparent V2

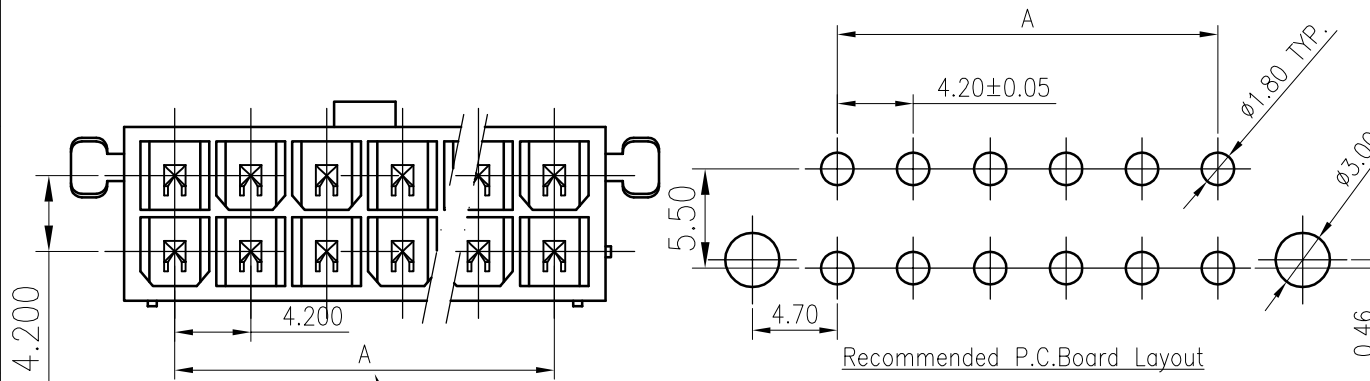

2x1~2x5P:±0.25  
2x6~2x12p:±0.35

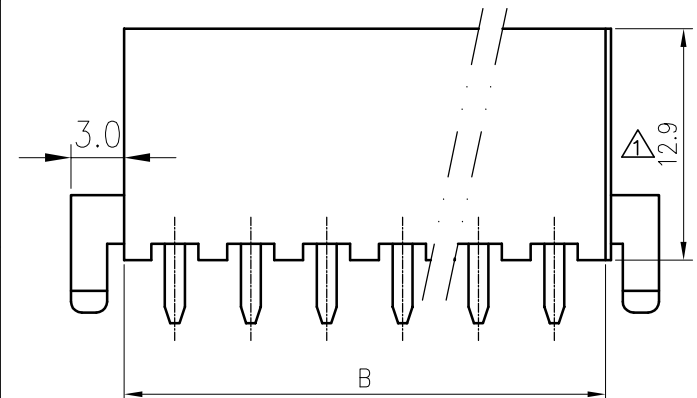

2x1~2x5P:±0.3  
2x6~2x12p:±0.4

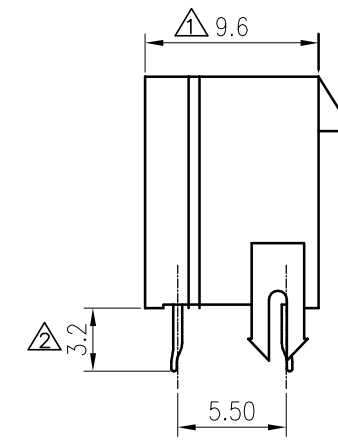

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2x1	/	5.60	2x7	25.20	31.00
2x2	4.20	9.60	2x8	29.40	35.20
2x3	8.40	13.80	2x9	33.60	39.40
2x4	12.60	18.30	2x10	37.80	43.60
2x5	16.80	22.60	2x11	42.00	48.10
2x6	21.00	26.60	2x12	46.20	52.30

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	UNIT:	SCALE:	SHEET:	PROJECTION:	REV.:	DRAWING NO.:	
A4					X. X ±0.30	MX4.2 DIP double row 180° Wafer hollow needle with column	Liujingtian 2020.5.22			mm	N/A	1/1	⊕	A3	4200WD202-B-S	
A3	1	Uniformly arrange the drawings	ZSZ	2022.01.16	X. XX ±0.20											
A2	2	Change the part number and frame format	LJT	2020.05.23	X. XXX ±0.10											
	1				Angle ±2°											

KONNRA 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co., Ltd.

PART NO. : C4200VD\*\*\*16T0104BB