


RoHS
COMPLIANT

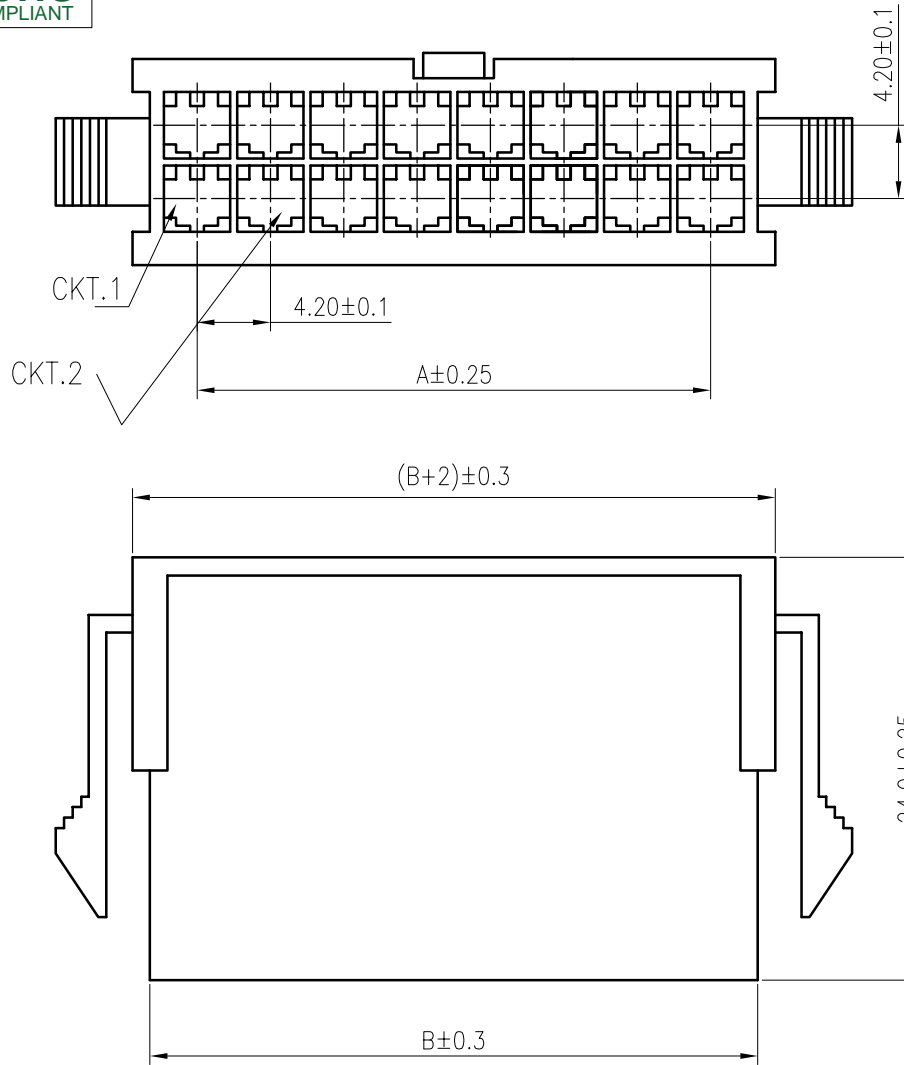

SPECIFICATIONS

1. Current rating: 9A(2P AWG#16) AC, DC
2. Voltage rating:600V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10mΩ/ max.

Material: Nylon 66 UL94 V-2 or V-0
Suitable KR4200 series female terminal
Mate with KR4200 series double row male housing

Ordering Code:

H4200F *** ** 01A

No. of Circuits
201:2x1,212:2x12
Insulator Material
01:PA66 White V0
02:PA66 Black V0
04:PA66 Black V2
16:PA66 Transparent V2
38:PA66 Blue V2
39:PA66 Green V2

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2x1	4.20	5.50	2x7	25.20	30.70
2x2	4.20	9.70	2x8	29.40	34.90
2x3	8.40	13.90	2x9	33.60	39.10
2x4	12.60	18.10	2x10	37.80	43.30
2x5	16.80	22.30	2x11	42.00	47.50
2x6	21.00	26.50	2x12	46.20	51.70

F					TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: MK4.2 Double Row Female Housing	DRAWN: Arvin 2020.12.21		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
		Uniformly arrange the drawings	ZSZ	2022.01.16			CHECKED:				
		Change the part number and frame format	Arvin	2020.12.21			APPROVED:		PART NO. : H4200F*****01A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A3
	1	2	3	4	5	6	7	8	9		